



DOME MONOCHROME CCTV CAMERA

Part 0-775-04

WARNINGS

Before using this unit please read these instructions carefully. Take special care to follow the warnings and safety suggestions listed below. Keep these instructions for future reference.


⚠ There are no user-serviceable parts within the unit, refer servicing to qualified service personnel.

PRECAUTIONS

- **Connection** - The camera should only be connected to a Durite cctv system.
- **Water and Moisture** - Do not install where it may be subject to water ingress or excessive moisture.
- **Heat** - Do not install the camera near heat sources.
- **Mounting** - Ensure the camera window is facing the desired direction before fixing the camera base.
- **Service** - The user should not attempt to service these units beyond that described in these instructions. All other servicing should be referred to an authorised service technician.

GENERAL

The camera has a CCD image sensor which gives a high quality picture and its solid state circuitry provides extremely long life. Compact size and single connection make it easy to install. Automatic gain control (AGC) provides a clear image in both strong sunlight and low light conditions. It is recommended that all camera lead connections are additionally sealed by either wrapping with a suitable tape or application of heat shrink sleeving, 19mm ID, over the joint of the connector.

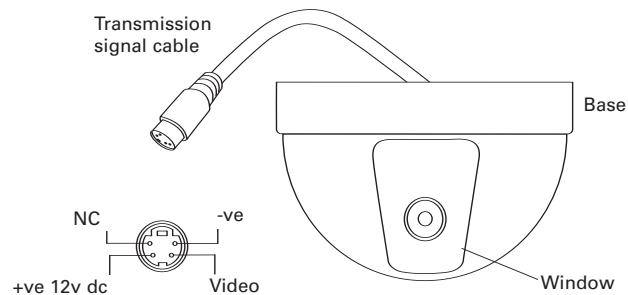

CAMERA SPECIFICATIONS

Part No.....	0-775-04
Pick up element.....	1/3" CCD (Samsung) image sensor
Sensitivity.....	0.1 lux
S/N ratio.....	>48 dB
Electronic shutter.....	Auto ≤ 1/100,000 sec
Lens.....	f3.6mm/F2.0
Video output.....	1 Vpp, 75 Ω
AGC.....	Auto
Power supply.....	12 volt dc
Power consumption.....	115mA
Weight.....	110 g
Dimensions	dia. 98mm x h 66mm
Storage temperature.....	-30°C to +60°C
Operating temperature.....	-10°C to +45°C



DOME MONOCHROME CCTV CAMERA

Part 0-775-04

WARNINGS

Before using this unit please read these instructions carefully. Take special care to follow the warnings and safety suggestions listed below. Keep these instructions for future reference.


⚠ There are no user-serviceable parts within the unit, refer servicing to qualified service personnel.

PRECAUTIONS

- **Connection** - The camera should only be connected to a Durite cctv system.
- **Water and Moisture** - Do not install where it may be subject to water ingress or excessive moisture.
- **Heat** - Do not install the camera near heat sources.
- **Mounting** - Ensure the camera window is facing the desired direction before fixing the camera base.
- **Service** - The user should not attempt to service these units beyond that described in these instructions. All other servicing should be referred to an authorised service technician.

GENERAL

The camera has a CCD image sensor which gives a high quality picture and its solid state circuitry provides extremely long life. Compact size and single connection make it easy to install. Automatic gain control (AGC) provides a clear image in both strong sunlight and low light conditions. It is recommended that all camera lead connections are additionally sealed by either wrapping with a suitable tape or application of heat shrink sleeving, 19mm ID, over the joint of the connector.

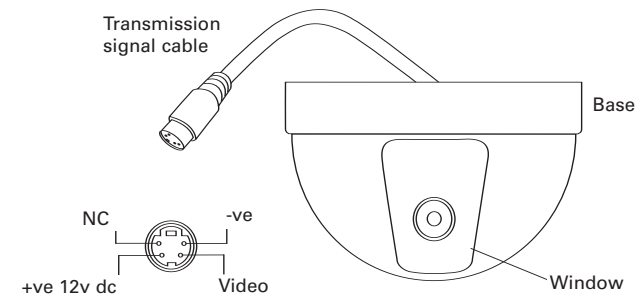

CAMERA SPECIFICATIONS

Part No.....	0-775-04
Pick up element.....	1/3" CCD (Samsung) image sensor
Sensitivity.....	0.1 lux
S/N ratio.....	>48 dB
Electronic shutter.....	Auto ≤ 1/100,000 sec
Lens.....	f3.6mm/F2.0
Video output.....	1 Vpp, 75 Ω
AGC.....	Auto
Power supply.....	12 volt dc
Power consumption.....	115mA
Weight.....	110 g
Dimensions	dia. 98mm x h 66mm
Storage temperature.....	-30°C to +60°C
Operating temperature.....	-10°C to +45°C