


# FITTING INSTRUCTION

EQUINOX AMBER LED LIGHTBAR RANGE AVAILABLE IN 600MM, 900MM, 1200MM & 1500MM LENGTHS.



## KEY POINTS

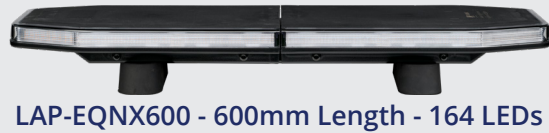

## APPLICATIONS



## WIRING

Cable Colour	Function	
Red	+VDC	
Black	- Ground	
Yellow	Flash Pattern	
White	Synchronisation	
900mm, 1200mm & 1500mm Lightbars Only	Blue	Connect to +VDC (RED) for Middle to Side Director
	Brown	Connect to +VDC (RED) for Right Director
	Green	Connect to +VDC (RED) for Left Director

## FLASH PATTERN CHANGE

Duration	Function
1 Second	Touch +VDC (RED) to change to next flash pattern
1-3 Seconds	Touch +VDC (RED) to change to previous flash pattern
5+ Seconds	For low-power mode (repeat to return to high-power mode)

## MAIN FEATURES

- ✓ Multi-voltage (10-30V)
- ✓ 215mm wide design for optimum light output
- ✓ ECE R65 class 2 and CISPR25 Class 3 approved
- ✓ Tough polycarbonate lens and aluminium base
- ✓ Secure 4-point fixing
- ✓ Supplied with 3m power cable
- ✓ Adjustable rubber fixing feet

## FLASH PATTERNS

Flash	Pattern	Flash	Pattern
1	Single (R65)	15	Right Constant
2	Double (R65)	16	Left Constant
3	Triple	17	Middle to Out
4	Quad (R65)	18	Left/Right Alternate (Fast)
5	Single (Slow) (Airport)	19	Left/Right Alternate (Fast)
6	Single (Left/Right) (R65)	20	Left/Right Alternate (Accelerate)
7	Double (Left/Right) (R65)	21	Centre/Out Quad
8	Triple (Left/Right)	22	Centre/Out Single (Accelerate)
9	Quad (Left/Right) (R65)	23	Left/Right + All Octa
10	Left/Right + All	24	Steady + Centre Double Flash
11	Single + Quad	25	Steady + Centre Single Flash
12	Right Director	26	Cycle (Flash 6, 19, 9, 18, 21, 2)
13	Left Director	27	Steady On
14	Middle to Out Director		