
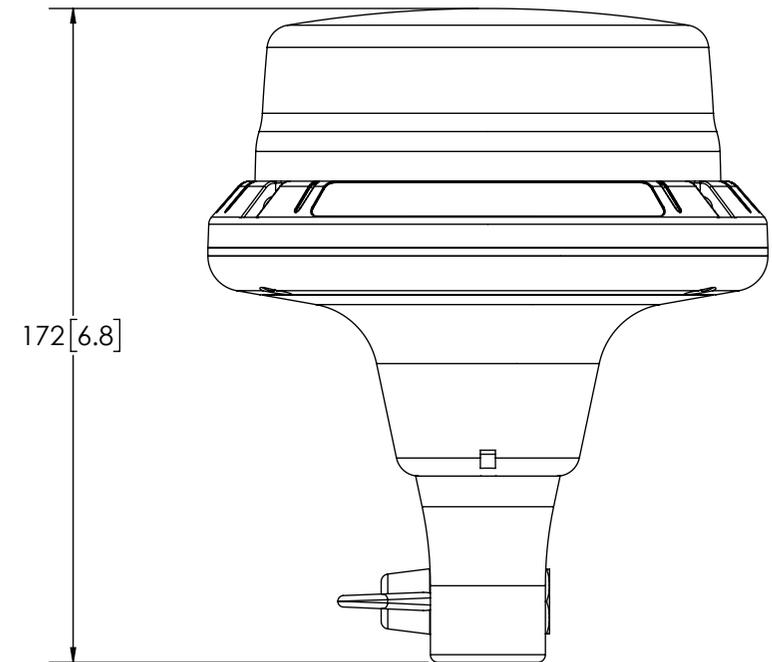


| REVISION HISTORY | | |
|------------------|--------------------------------|------------|
| REV. | DESCRIPTION | DATE |
| 01 | PRELIMINARY RELEASE PER LP0001 | 2020-11-18 |
| A | INITIAL RELEASE PER LP0001 | 2020-12-17 |

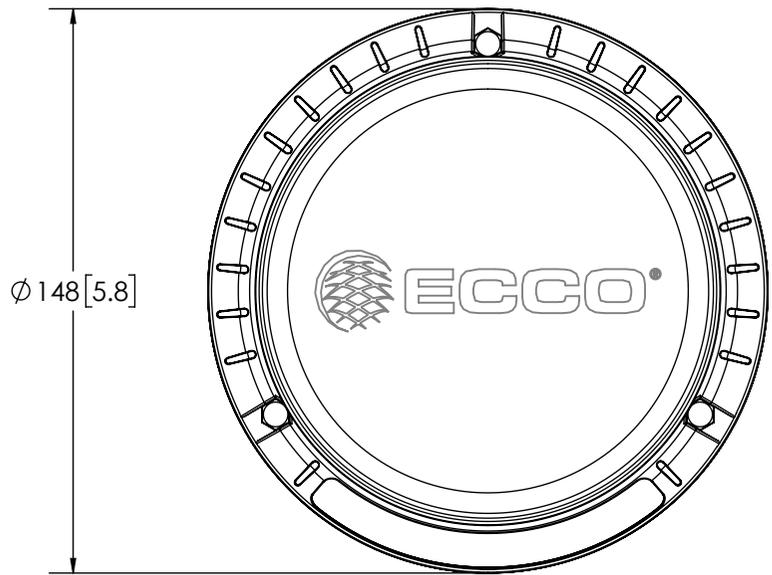

SPECIFICATIONS

- CERTIFICATIONS: ; ECE R10; Reg 65 (SEE CHART); IP69K
 Note: Unique components, accessories, and hardware kits are not typically included in the Product Certification Test Protocols. Unless otherwise Specified, the Product Certifications referred to herein are predicated upon the base product model configuration.
- FLASH MODE: ROTATE : 150 ± 10 FLASHES PER MINUTE
- VOLTAGE (NOMINAL): 12-24 VDC
- VOLTAGE (EXTREME): 10-32 VDC
- CURRENT (PEAK): 5.5A (@ 10.5 VDC NOMINAL)
- POWER (MAXIMUM): 60W (@ 10.5 VDC NOMINAL)
- TEMPERATURE RANGE: -30°C (-22°F) TO 50°C (122°F)
- CONNECTION: 2-18 AWG. WIRES
- MOUNTING: FLEXI DIN POLE MOUNT
- BASE MATERIAL: ALUMINIUM
- LENS MATERIAL: POLYCARBONATE
- PRODUCT WEIGHT: 0.72 Kg (1.59 LBS)

| FGS. PRODUCT CHART | | |
|--------------------|-------------|---------|
| FGS. NO. | COLOUR | ECE R65 |
| EB5103AA | AMBER/AMBER | YES |
| EB5103CA | CLEAR/AMBER | YES |
| EB5103CG | CLEAR/GREEN | - |

NOTES:
 1. ROHS COMPLIANT
 2. DIMENSIONS IN MILLIMETRES [INCHES (FOR REFERENCE)]

| SCALE 1:2 | | APPROVALS | DATE |
|--|------------------|------------------------|------------|
| CAD GENERATED DRAWING DO NOT MANUALLY UPDATE. MODEL REFERENCED: 01 | | DRAWN BY: LSH | 2020-11-19 |
| TOLERANCES ARE IN INCHES, AND MILLIMETERS TOLERANCES UNLESS OTHERWISE STATED ARE: | | CHECKED: PC | 2020-12-02 |
| MILLIMETERS DECIMALS | INCHES DECIMALS | MECH. ENG. KW | 2020-11-25 |
| XX. ± 1.0mm | X.X ± 0.1 | ELEC. ENG. MMG | 2020-11-20 |
| XX.X ± 0.5mm | X.XX ± 0.04 | TEST ENG. AD | 2020-12-16 |
| | X.XXX ± 0.02 | SALES. GM | 2020-12-17 |
| | ANGLES ± 0.5° | THIRD ANGLE PROJECTION | |
| | FRACTIONS ± 1/64 | | |

ECCO® www.eccolink.com

Americas (800) 635-5900 | Europe +44 (0)113 237 5340 | Asia Pacific +61 (0)3 63322444

LOW PROFILE, FLEX DIN, R65, 12/24V

CUSTOMER PART NO.
SEE CHART

| | | |
|---|-------------------|--------------------------|
| SIZE: A4 | DWG. NO. EB5103XX | REV. A |
| SHEET 1 OF 1 | | Project: LP0001 |
| Electronically Controlled Use Latest Copy | | Date Created: 2020-11-18 |

PROPRIETARY AND CONFIDENTIAL INFORMATION
 THIS DRAWING AND THE DESIGN AND OTHER INFORMATION DISCLOSED HEREIN ARE THE PROPERTY OF ELECTRONIC CONTROLS COMPANY AND/OR ITS ECCO SAFETY GROUP AFFILIATES ("ECCO") AND IS ISSUED IN CONFIDENCE TO RECIPIENT FOR ENGINEERING INFORMATION PURPOSES ONLY. THIS DRAWING AND THE DESIGN AND OTHER INFORMATION DISCLOSED HEREIN MAY NOT BE USED, COPIED, REPRODUCED OR OTHERWISE DISCLOSED IN PART OR IN WHOLE TO THIRD PARTIES OR USED FOR ANY OTHER PURPOSE WITHOUT PRIOR ECCO WRITTEN CONSENT. ECCO RESERVES ALL PATENT, COPYRIGHT, TRADEMARK, AND OTHER PROPRIETARY RIGHTS TO THIS DOCUMENT, INCLUDING ALL DESIGN, MANUFACTURING, REPRODUCTION, USE AND SALES RIGHTS THEREOF. THIS DRAWING IS SUBJECT TO RECALL BY ECCO AT ANY TIME, AND YOUR POSSESSION AND/OR USE CONSTITUTES ACCEPTANCE OF THESE TERMS. ©2020 ELECTRONIC CONTROLS COMPANY