

'GLED6A' & 'MLED6AV' RANGES

TRADITIONAL GLED6A & VERTICALLY MOUNTED MLED6AV MODULE

GLED6A RANGE



MAIN FEATURES


- Multi-voltage (10-30V)
- 5 flash patterns (double flash R65 approval)
- Manufactured with 6 x 6W LEDs
- Link multiple units for sync / alternate flash
- Current consumption: 0.4A @ 12V, 0.2A @ 24V
- Steady on function

Part Number	Dimensions (L) x (W) x (H)	Current @ 12V / 24V
GLED6A	128 x 28 x 17mm	0.4A / 0.2A

MLED6AV RANGE



MLED6AV
(Vertical Mount / R65 Approved
Horizontal Beam Pattern)

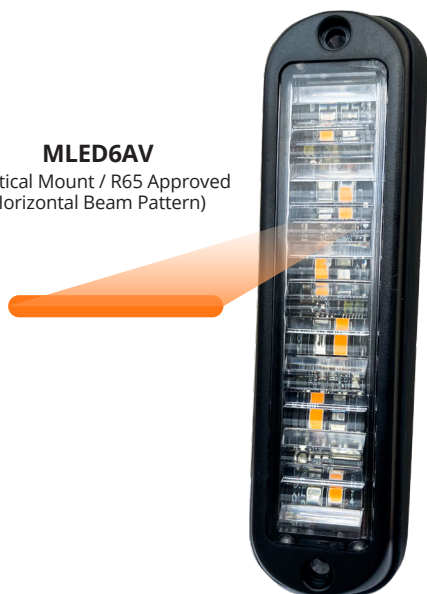

MAIN FEATURES

- Multi-voltage (10-30V)
- 18 flash patterns
- Single, double & quad flash meet R65 approval
- Manufactured with 6 x 2W LEDs
- Link up to 6 units for synchronised flash
- R65 approved horizontal beam pattern when mounted vertically

Part Number	Dimensions (L) x (W) x (H)	Current @ 12V / 24V
MLED6AV	118 x 29 x 11mm	1.0A / 0.5A

