


MLPB LED RANGE



MAIN FEATURES

- Multi-voltage (10-30V)
- Quad (R65), eight-flash & rotating flash patterns
- Quad flash only for MLPB040 (flexi-DIN) model
- Manufactured with 18 x 0.5W LEDs
- Ultra-compact and low-profile design
- Low current consumption: 0.8A @ 12V, 0.4A @ 24V
- -30°C to +50°C extreme temperature reliability
- 110mm PCD for 3-point fitting models (MLPB050)
- Combine with LAP912 seat belt to create beacon + seat belt kit (see page 23)

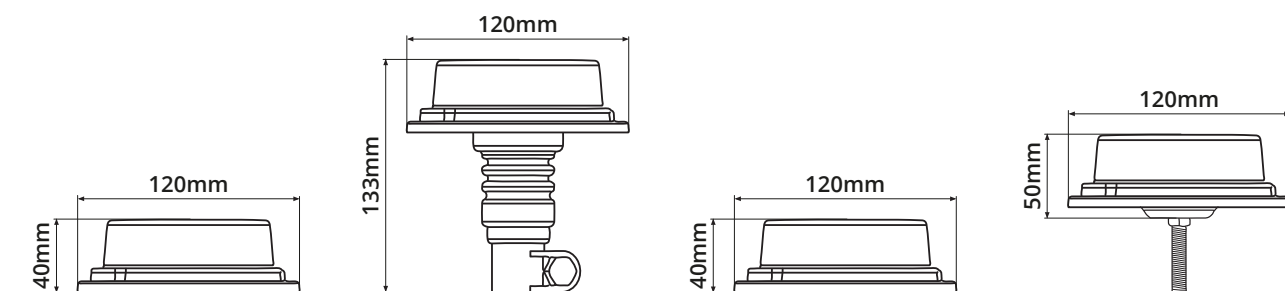

MLPB020	MLPB040	MLPB050	MLPB060
Magnetic	Flexi-DIN	3-Point	Single Point
0.3KG	0.3KG	0.1KG	0.1KG

